

BUTTERFLY VALVE (LEVER TYPE)

PN 16



Model: 71L



- Fusion Bonded Epoxy Coating
- Standard to BS EN 593/BS 5155
- Universal Flange Drilling
- Actuator Mounting Flange to ISO 5211
- Application: Liquids, hot & cold water, oil, gas

Specifications

Working Pressure		16 Bar
Temperature		120°C
Ends Connection		JIS 10K / BS 4504 PN16
Hydraulic Test	Body	24 Bar
	Seat	17.6 Bar

Materials

No.	Part	Material	
1	Lever	Steel	SS400
2	Index Plate	Chrome Plated	SS400+13%Cr
3	Bushing	Teflon	PTFE
4	O - Ring	Rubber	EPDM
5	Stem	Stainless Steel	410
6	Pin	Stainless Steel	410
7	Disc	Stainless Steel	316/304
8	Seat	Rubber	EPDM
9	Body	Cast Iron	FC20

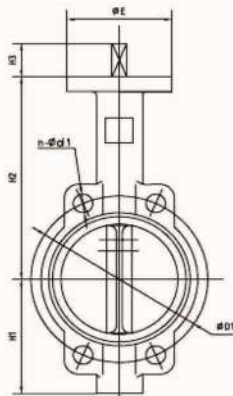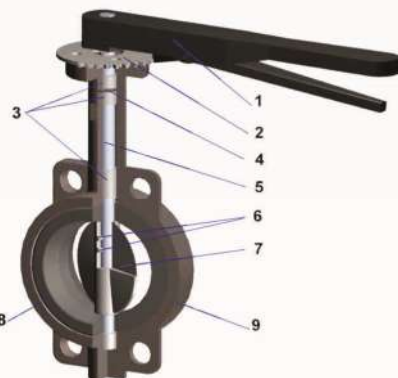

Due to continuous product development, data is not binding and may change without prior notice

Dimensions

DN		L	ØD1	n - Ød1	H1	H2	H3
inch	mm						
2"	50	43	125	4-19	80	161	32
2 1/2"	65	46	145	4-19	89	175	32
3"	80	46	160	8-19	95	181	32
4"	100	52	180	8-19	114	200	32
6"	150	56	240	8-23	139	226	40
8"	200	60	295	12-23	175	260	40
10"	250	68	355	12-28	203	292	40
12"	300	78	410	12-28	242	337	40